


**DIN 601/555 ZESKANTBOUT MET ZESKANTMOER - STAAL
ELEKTROLYTISCH VERZINKT**

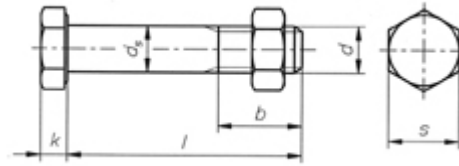

d	M5	M6	M8	M10	M12	M14	M16	M18	M20	M22	M24	M27	M30	M36	M39
p	0.8	1	1.25	1.5	1.75	2	2	2.5	2.5	2.5	3	3	3.5	4	4
b1	16	18	22	26	30	34	38	42	46	50	54	60	66	78	84
b2	22	24	28	32	36	40	44	48	52	56	60	66	72	84	90
b3	35	37	41	45	49	53	57	61	65	69	73	79	85	97	103
k	3.5	4	5.3	6.4	7.5	8.8	10	11.5	12.5	14	15	17	18.7	22.5	25
s	8	10	13	17	19	22	24	27	30	32	36	41	46	55	30

b : minimale schroefdraadlengte b1 : $L \leq 125\text{mm}$ b2 : $125\text{mm} < L \leq 200\text{mm}$ b3 : $L < 200\text{mm}$