


DIN 7984 LAGE CILINDERSCHROEF MET BINNENZESKANT

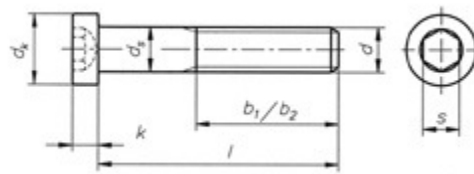

d	M3	M4	M5	M6	M8	M10	M12	M16	M20	M24
p	0.5	0.7	0.8	1	1.25	1.5	1.75	2	2.5	3
b=L<125mm	12	14	16	18	22	26	30	38	46	54
b=L125-200mm	-	-	-	-	28	32	36	44	52	60
b=L>200mm	-	-	-	-	-	-	-	57	65	73
dk	5.5	7	8.5	10	13	16	18	24	30	36
ds	3	4	5	6	8	10	12	16	20	24
k	2	2.8	3.5	4	5	6	7	9	11	13
t	1.5	2.3	2.7	3	3.8	4.5	5	5.5	7.5	8
s	2	2.5	3	4	5	7	8	12	14	17

k = hoogte kop

t = diepte umbraco