


DIN 963 VERZONKEN SCHROEF MET ZAAGGLEUF

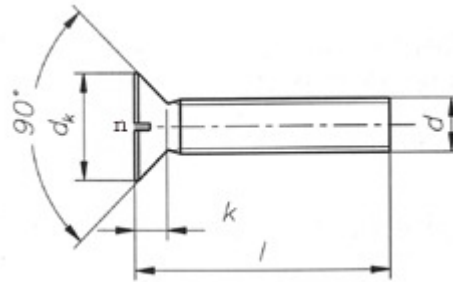

d	M1.6	M2	M2.5	M3	M3.5	M4	M5	M6	M8	M10	M12
P	0.35	0.4	0.45	0.5	0.6	0.7	0.8	1	1.25	1.5	1.75
dk	3	3.8	4.7	5.6	6.5	7.5	9.2	11	14.5	18	22
k	1	1.2	1.5	1.65	1.93	2.2	2.5	3	4	5	6
n	0.4	0.5	0.6	0.8	0.8	1	1.2	1.6	2	2.5	3